

# Figure 8

SPK-TRP 2X 0.75 MM WH/BK 1HM

## Contact

Sales

Phone: 1300 CABLES

olexcustomerservice@nexans.com

**Nexans Ref.:** JSF.75WTBK1


**EAN 13:** 9322576232670

Two stranded bare copper conductors, PVC insulated (parallel webbed)

## DESCRIPTION

**Applications** Suitable for use in audio systems for low and high power speaker connections, security applications.

**Construction** Two stranded bare copper conductors, PVC insulated (parallel webbed) available with standard or oxygen free copper.

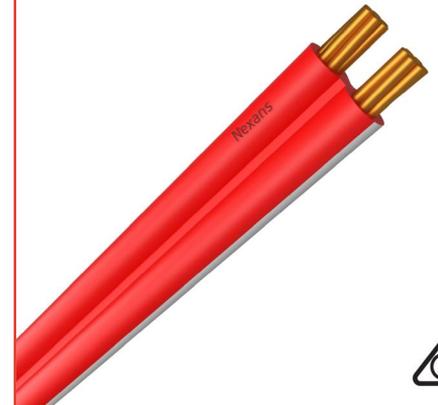

Conductor flexibility  
**Flexible**

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 22/03/23 [www.nexans.com.au](http://www.nexans.com.au) Page 1 / 2

The Nexans logo, consisting of a stylized red 'N' followed by the word 'nexans' in a black, lowercase sans-serif font.

# Figure 8

SPK-TRP 2X 0.75 MM WH/BK 1HM

## Contact

Sales

Phone: 1300 CABLES

olexcustomerservice@nexans.com

## CHARACTERISTICS

### Construction characteristics

|                       |                      |
|-----------------------|----------------------|
| Conductor flexibility | Flexible             |
| Conductor material    | Stranded bare copper |
| Conductor shape       | Circular             |

### Dimensional characteristics

|                              |                      |
|------------------------------|----------------------|
| Approximate weight           | 3.0 kg/100m          |
| Conductor cross-section      | 0.75 mm <sup>2</sup> |
| Nominal Overall Size (mm)    | 5.9 x 2.9            |
| Nominal insulation thickness | 0.8 mm               |
| Stranding (No./mm)           | 24/0.20              |

### Electrical characteristics

|   |             |
|---|-------------|
| Max. DC resistance of the conductor at 20°C | 26 Ohm/km   |
| Rated Voltage U <sub>0</sub> /U             | -           |
| Voltage drop single phase at 45°C           | 57.1 mV/A.m |