



BLADE SL9707TC - 20/35W

LED low profile batten with selectable colour temperature

Application

Conventional LED profile battens for commercial service spaces

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K, 4000K, 5000K
- Extruded aluminium body with plastic end cap with a rear cable channel allowing easy wiring
- Quality white powder coat finish
- Integral constant current non-dimmable LED driver, 20 or 35 watt
- Robust opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI> 80, 110 degree beam



Technical Specification


| Model No. | Description | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K) | CRI |
|--------------|----------------|----------------------|-----------|----------------|----------------|-----|
| SL9707/60TC | LED BATTEN 20W | 240 | 20 | 1800/1900/1850 | 3000/4000/5700 | 80 |
| SL9707/120TC | LED BATTEN 35W | 240 | 35 | 3300/3500/3400 | 3000/4000/5700 | 80 |

Technical Specification


| Model No. | Beam Angle (°) | Dim (mm) | Body Colour |
|--------------|----------------|-------------------------|-------------|
| SL9707/60TC | 110 | 597(L) x 80(W) x 34(H) | WHITE |
| SL9707/120TC | 110 | 1197(L) x 80(W) x 34(H) | WHITE |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

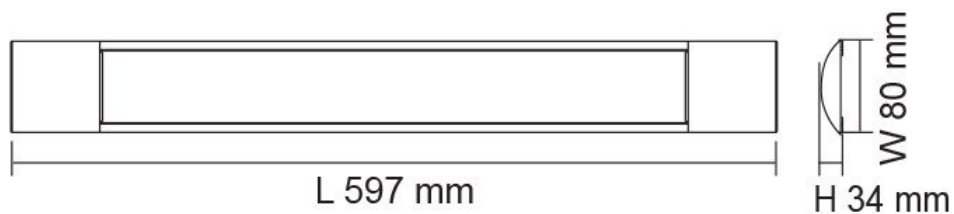


SL9707/60TC

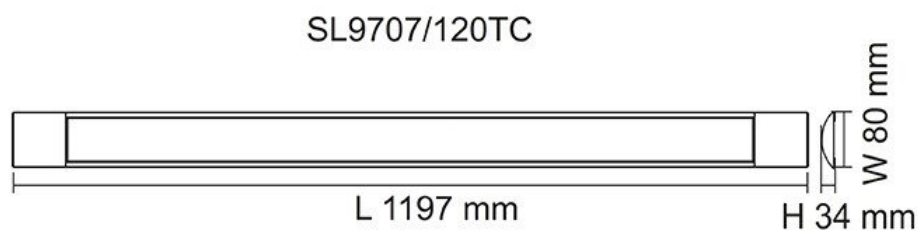


Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

SL9707/60TC at 3000K

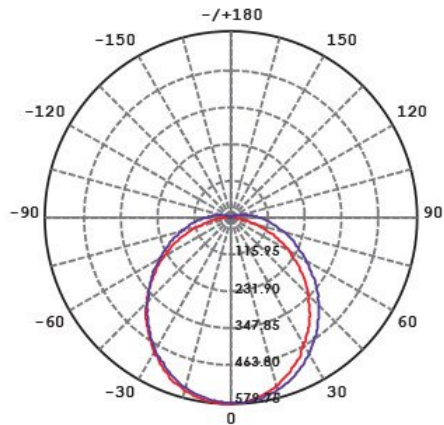

SL9707/120TC at 5700K

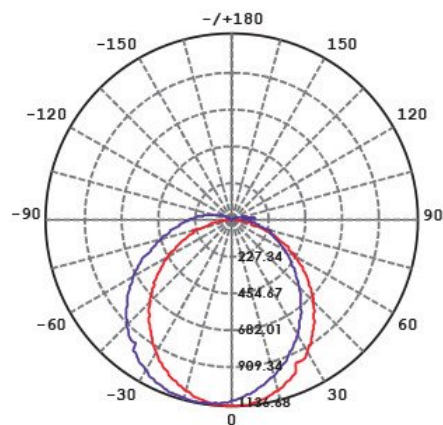

Product Images

