


# ALPHALUX

## QUALITY LED SOLUTIONS


### 14W LED OTTO BUNKER - OVAL

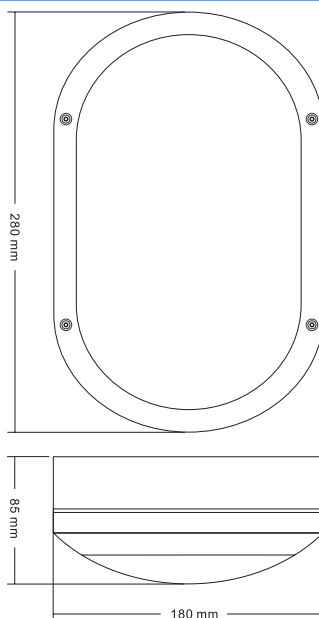

### DIMENSIONS


Weight	Length	Width	Height
1.1 kg	280 mm	180 mm	85 mm

### AAI FIGURE

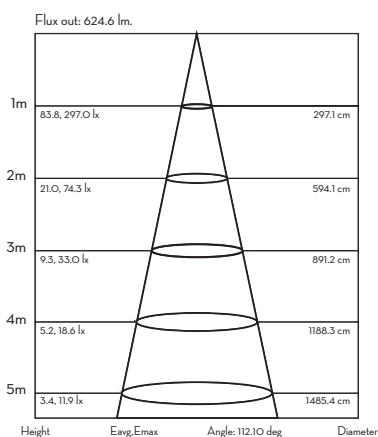

The curves indicate the illuminated area and the average illumination when the luminaire is at different distance

### LUMINOUS INTENSITY DISTRIBUTION

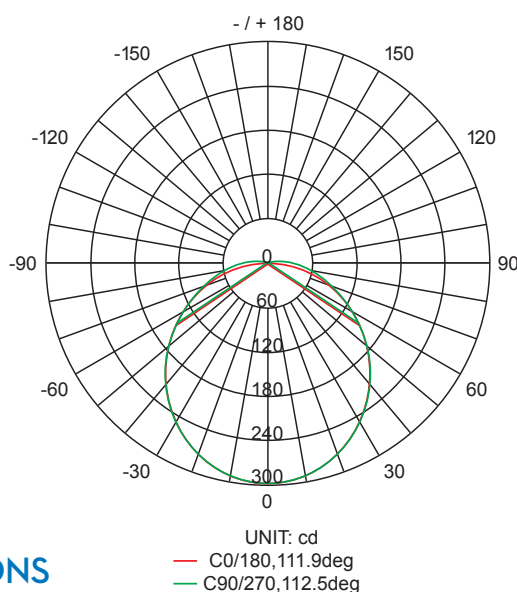

### TECHNICAL SPECIFICATIONS

Product Code	Wattage	Voltage	Delivered Lumens	Power Factor	Efficacy	CCT	CRI	Life Hours
ALXLEDOTTO2-O	14W	240V	913 lm	0.94	64 lm/W	4300K	85 Ra	50,000 hrs

### ENERGY EFFICIENT ALTERNATIVE TO: 75W INCANDESCENT BUNKER LIGHTS

#### Product Features

- Instant start
- Low start up current
- Includes LED constant current driver
- Heavy duty diffuser
- Opal finish on cover
- Cast aluminium housing
- IP65 weatherproof
- Vandal resistant
- Includes 3 year warranty

#### ECO-friendly

- Free from harmful chemicals and substances (RoHS compliant)
- Recyclable

#### Applications

- Exterior lighting
- Security lighting
- Underground lighting
- Tunnels
- Shelters
- Industrial sites
- Warehouses



Contact 1300 651 066

protick.com.au

