

**PUSWV1G**  
**PUSWV2G**  
**PUSWV3G**  
**PUSWV4G**  
**PUSWV5G**  
**PUSWV6G**

#### Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.



## Puma Range of Switch Plates

- Switches are rated 250V 16A/10AX and approved to AS/NZS60669-1
- Fits standard Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm<sup>2</sup> cabling with 4.1 bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Colour: White
- Typical example of size seen below:

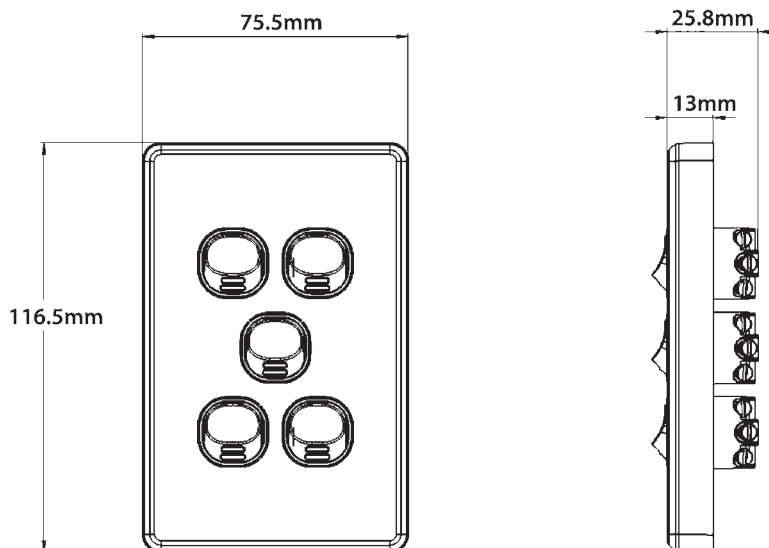

Catalogue Number	Description
PUSWV1G	Switch Vertical 1 Gang, 16A/10AX 250V~
PUSWV2G	Switch Vertical 2 Gang, 16A/10AX 250V~
PUSWV3G	Switch Vertical 3 Gang, 16A/10AX 250V~
PUSWV4G	Switch Vertical 4 Gang, 16A/10AX 250V~
PUSWV5G	Switch Vertical 5 Gang, 16A/10AX 250V~
PUSWV6G	Switch Vertical 6 Gang, 16A/10AX 250V~

**Certification Number:** TBC

**GSM Electrical (Australia) Pty Ltd**

Level 2/142-144 Fullarton Road, ROSE PARK SA 5067  
 p: 1300 301 838 f: 1300 301 778 e: service@gsme.com.au  
[www.gsme.com.au](http://www.gsme.com.au)



Data Specification Sheet  
 May 2016