



## ECO LED Colour Select Batten



Designed with the professional installer in mind, ECO LED Batten is the ideal batten for clean, even light distribution with quick to fit one piece sealed LED module. Now comes with selectable colour temperatures of 4000K, 5000K or 6500K for different application requirements.

- Select Colour temperature from 4000K, 5000K or 6500K with the switch located inside the gear tray
- Quick and easy to install with unpluggable Insect proof sealed LED module
- Opalised diffuser for even light distribution
- 20mm knockouts for conduit or cable glands from end or rear
- Ta 40, IK06
- Non dimmable
- Wireguard option available, WG2 and WG4
- 54,000hrs to L70, up to 105lm/W



### GENERAL SPECIFICATION


CRI	DIMMABLE	IP RATING	IK RATING	FINISH	COLOUR	WEIGHT
80	No	IP20	IK06	Powdercoated	White	1kg
BEAM ANGLE	BEAM DISTRIBUTION	VOLTAGE	CHIP CONFIGURATION	LAMP TYPE	OPERATING TEMPERATURE	
120°	Symmetric	240V	PCBA	LED (PCBA)	0 to 40°C	

### UNIQUE SPECIFICATION

ITEM CODE	DESCRIPTION	LUMEN OUTPUT	DIMENSIONS H x W x L (MM)	CIRCUIT WATTAGE
ECOBAT202ECS	ECO LED COLOUR SELECT BATTEN 20W 600MM NON-DIM	2300Lm	74 x 74 x 603	20W
ECOBAT404ECS	ECO LED COLOUR SELECT BATTEN 40W 1200MM NON-DIM	4300Lm	74 x 74 x 1164	40W

# ECO LED Colour Select Batten

## PRODUCT IMAGES

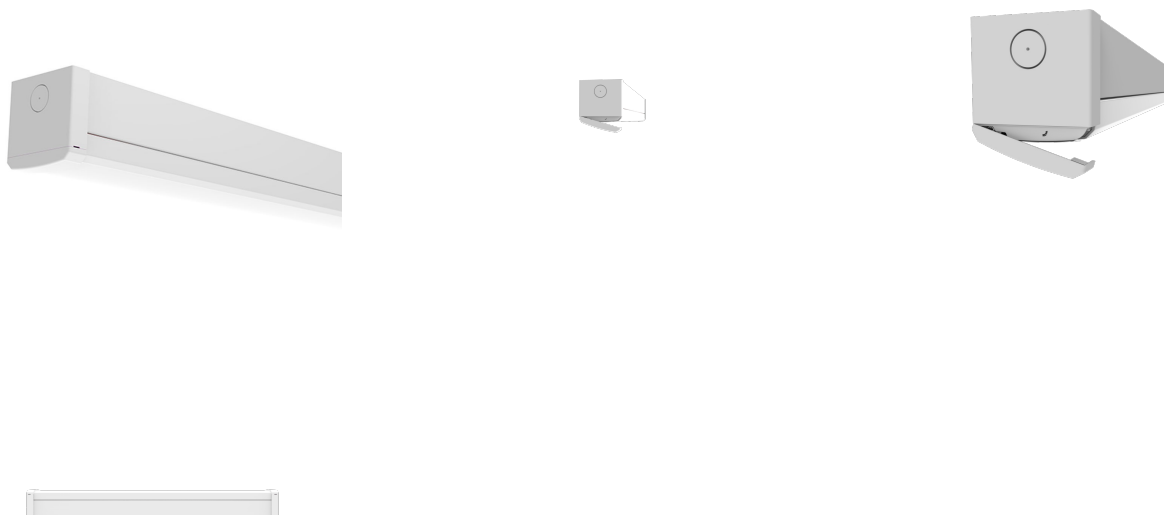

## LINE DRAWINGS

