


SRE HEATSHRINK END CAPS

CABAC's End Caps are used for sealing cable ends during installation or storage. They are made from cross-linked polyolefin and have a hot melt glue liner that bonds the cap to the cable jacket.

- Quick reliable seal of cable ends
- Watertight and unlimited storage life
- Highly resistant to ultraviolet rays, aggressive soils, chemicals & corrosion

The SRE cap should be shrunk onto the cable end starting the shrinkage process from the closed end. Once shrink is complete glue should extrude from the edges of the cap.

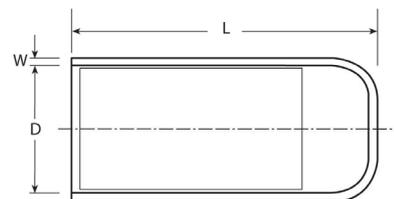

Part No.	Inner Diameter D (mm)		Cable Range O.D. (mm)	Recovered Wall Thickness W (mm)	Length L (mm)
	Pre Shrink	After Shrink			
Glue-Lined (Hot Melt Adhesive)					
SRE0	6	2	2.5 - 4	2	25
SRE1	12	4	5-10	2.6	40
SRE2	20	6	8-16	2.5	55
SRE3	40	15	18 - 32	3.3	75
SRE4	55	26	28 - 48	3.5	105
SRE4-LONG	55	23	25 - 48	3.8	140
SRE4.5	75	36	40 - 68	4.2	115
SRE4.5-LONG	75	36	40 - 68	4	150
SRE5	100	52	55 - 90	5	130
SRE6	120	60	65 - 110	5	150
SRE7	145	60	70 - 130	5	150
SRE8	200	90	100 - 180	4.5	145
Unlined (Without Hot Melt Adhesive)					
SRE4U	55	26	28 - 48	3.5	105
SRE4U-LONG	75	35	42 - 68	4	180
SRE5U	100	52	55 - 90	5	130
SRE6U	120	60	65 - 110	5	150
SRE6U-LONG	100	45	55 - 90	4	200



TECHNICAL DATA

Conformant Standards	ASTM IEC	Breakdown Voltage	12 kV/mm wall thickness
Material	Cross-linked polyolefin	Volume Resistivity	$1.0 \times 10^{14} \Omega \cdot \text{cm}$
Continuous Operating Temp	-35°C to +110°C	Water Absorption	< 0.5%
Shrinkage Temp	> 120°C	Flammability	Flammable
Tensile Strength	12 MPa	UV Resistance	Passed - ISO 1408
Elongation at Break Point	200%	Hardness	50 Shore D
Longitudinal Shrinkage	10%		

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.