
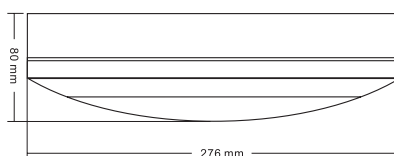


ALPHALUX

QUALITY LED SOLUTIONS


14W LED OTTO BUNKER - ROUND

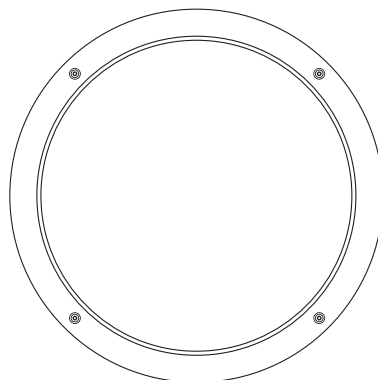

DIMENSIONS


Weight	Length	Width	Height
1.3 kg	276 mm	276 mm	80 mm

AAI FIGURE

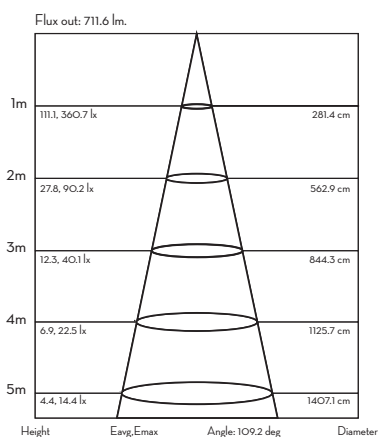

The curves indicate the illuminated area and the average illumination when the luminaire is at different distance

LUMINOUS INTENSITY DISTRIBUTION

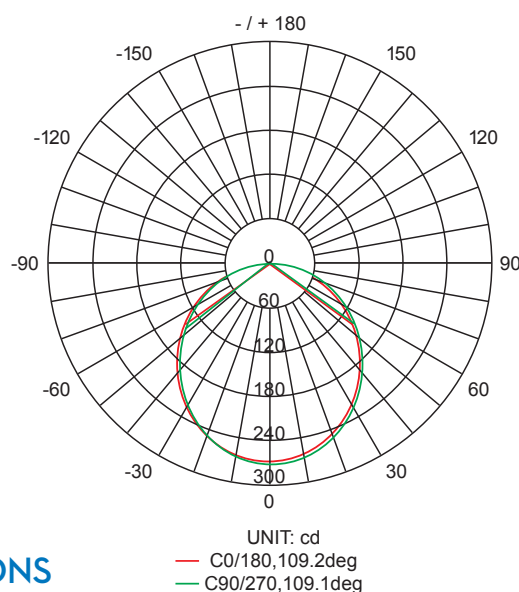

TECHNICAL SPECIFICATIONS

Product Code	Wattage	Voltage	Delivered Lumens	Power Factor	Efficacy	CCT	CRI	Life Hours
ALXLEDOTTO2-R	14W	240V	1041 lm	0.94	70 lm/W	4300K	85 Ra	50,000 hrs

ENERGY EFFICIENT ALTERNATIVE TO: 75W INCANDESCENT BUNKER LIGHTS

Product Features

- Instant start
- Low start up current
- Includes LED constant current driver
- Heavy duty diffuser
- Opal finish on cover
- Cast aluminium housing
- IP65 weatherproof
- Vandal resistant
- Includes 3 year warranty

ECO-friendly

- Free from harmful chemicals and substances (RoHS compliant)
- Recyclable

Applications

- Exterior lighting
- Security lighting
- Underground lighting
- Tunnels
- Shelters
- Industrial sites
- Warehouses



Contact 1300 651 066

protick.com.au

