



Representative Photo Only
(actual product may vary based on configuration selections)

Xenon Beacon (Strobe) 12/24V DC - Blue Lens. 1.4 Joule Light Energy

- Complete visual signalling range from high efficiency static or flashing LED's to high discharge Xenon beacons to rotating parabolic reflector beacons, we have the solution suitable for your application.
- Available in a variety of frame sizes and with accessories such as protective cages and brackets to cater to your mounting requirements.
- Multiple colour varieties available including Red, Green, Amber and Blue to convey whichever message is required.

SPECIFICATIONS

Indication Mode(s)	Sight
Lamp Type	Xenon type
Colour, Lamp	Blue colour
Illumination Mode	Flashing
Speed, Flash	60 per min
Lamp Power, Max	3 W max
Un, Nominal Operational Voltage(s), DC	12 V DC 24
Ie, Rated Operational Current, nom	0.14 A,nom
Ie, Rated Operational Current, nom	0.14 A,nom
Details, Current	85mA Rated at 24DC
Material, Body / Housing	PC (Polycarbonate) material
Connection / Termination	Screw Terminal(s)
IP Rating	IP65
Mounting (Multiple)	Ceiling Mount Wall Mount
Weight	0.14 kg
Operating Temperature, Min	-20 °C min
Operating Temperature, Max	40 °C max

Catalogue No: **KL3061B**

BEACON 3J-XENON FLASH/STROBE IP65 12-24V DC BLUE

Signalling Devices > Sight Indication > Beacons > Moflash Beacons > Xenon Beacons > Flashguard Xenon Beacons



REFERENCES

IECEX Certificate -

Supplier Declaration of
Conformity: -


Installation Guide: -

User Manual: -

Manufacturer Datasheet: [KL3061B_ManufacturerDatasheet](#)

Manufacturer Catalogue
& Product Selection: -

Standard and Fire Style

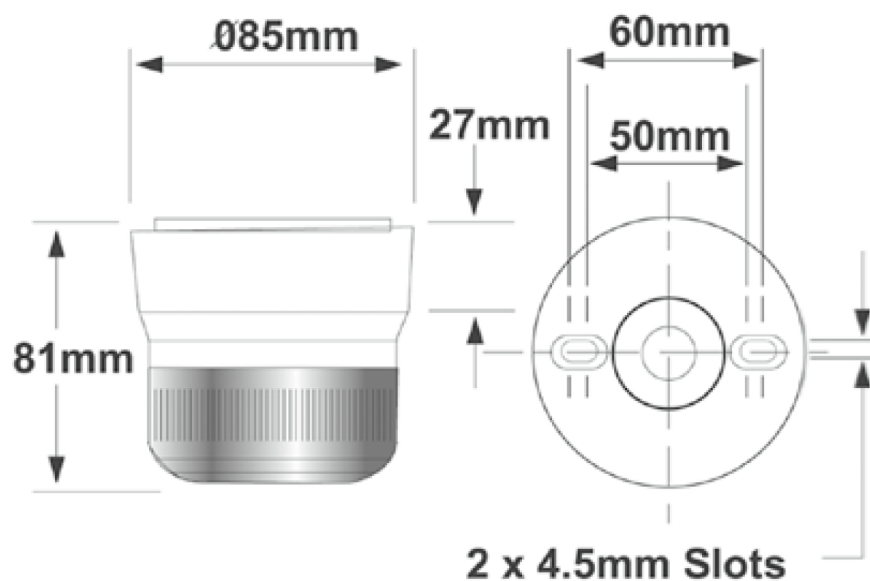

Dimension Diagram