

240V T8 LED TUBE

LT8/60, LT8/120 T8 LED TUBE

CONSTRUCTION

- Fit new T8 LED light or retrofit T8 fluorescent light (Magnetic Ballast)
- 320° beam angle
- Full glass body with shatter proof poly coating
- Built-in LED driver
- No flicker, instant start
- Safety LED fuse included

COLOUR TEMPERATURE


- 3000K WARM WHITE
- 4000K COOL WHITE
- 6000K DAYLIGHT

LAMP BASE


- G13



DIMENSIONS



WIRING DIAGRAM

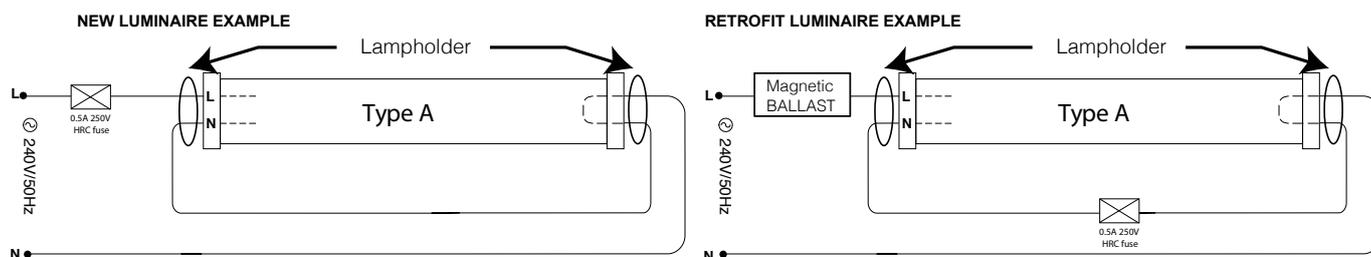

IMPORTANT WARNING

The luminaire that these LED tubes are installed in may need to be converted in accordance with AS/NZS60598.2.1:2014 by a suitably qualified person. In all instances any capacitors must be removed from the circuit.

Model No.	Input	Power	Lumen	Beam Angle	CCT	CRI	Dimmable	Dimensions Ø x H	Lamp Base
LT8/60 WW	240V	9W	900lm	320°	3000K	>80	No	600 x 26 mm	G13
LT8/60 CW	240V	9W	950lm	320°	4000K	>80	No	600 x 26 mm	G13
LT8/60 DL	240V	9W	1000lm	320°	6000K	>80	No	600 x 26 mm	G13

Model No.	Input	Power	Lumen	Beam Angle	CCT	CRI	Dimmable	Dimensions Ø x H	Lamp Base
LT8/120 WW	240V	18W	1800lm	320°	3000K	>80	No	1200 x 26 mm	G13
LT8/120 CW	240V	18W	1900lm	320°	4000K	>80	No	1200 x 26 mm	G13
LT8/120 DL	240V	18W	2000lm	320°	6000K	>80	No	1200 x 26 mm	G13