



# TL-D LIFEMAX Super 80 JIS

## TL-D 18W/840 JIS 1SL/25

The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires. The lamp is complying with Japanese Industrial Standard.


### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	10000 h
Life to 50% Failures (Nom)	13000 h
Life to 50% Failures Preheat (Nom)	20000 h
Light Technical	
Color Code	840 [ CCT of 4000K]
Luminous Flux (Nom)	1450 lm
Color Designation	Cool White (CW)
Lumen Maintenance 2000 h (Nom)	96 %
Lumen Maintenance 5000 h (Nom)	94 %
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	80.5 lm/W
Color Rendering Index (Nom)	82
Operating and Electrical	
Power (Rated) (Nom)	19 W
Lamp Current (Nom)	0.35 A
Voltage (Nom)	65 V

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	Green Cap
Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg
Product Data	
Full product code	871150062989000
Order product name	TL-D 18W/840 JIS 1SL/25
EAN/UPC - Product	8711500629890
Order code	927919984033
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927919984033
Net Weight (Piece)	0.080 kg

TL-D LIFEMAX Super 80 JIS

Dimensional drawing

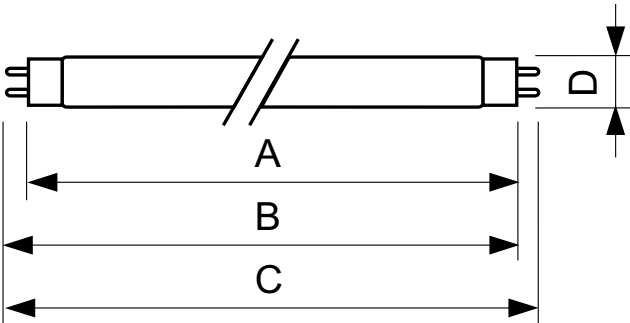

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/840 JIS 1SL/25	28 mm	581.3 mm	588.4 mm	585.8 mm	595.5 mm

