

FB1W-X4F01R

KEYED E-STOP STATION PUSHLOCK KEY RESET, 1NC

EMERGENCY STOP STATION > KEYED NON ILLUMINATED-WITHOUT EMERGENCY STOP LABEL



FEATURES

Enclosure:

- Easy Installation
- Polycarbonate enclosure cover and base
- Stainless steel screws
- Surface mount
- IP65 Rating

HW Series E-Stop:

- Contact normally closed in the ON position
- Push button to lock into the OFF position when pushed button requires a keyed release back to the on position
- Key removable in both the on and off positions
- Robust and tamper proof suitable for flush mounting unless otherwise specified

APPLICATIONS

- Industrial manufacturing
- Commercial applications
- Automotive, heavy equipment
- Marine/aviation

SPECIFICATIONS


Part No.	FB1W-X4F01R
Current Rating	Max.10A
Mushroom Diameter	40mm
Function	Pushlock key reset
Bezel	Plastic
Button Color	Red
Contacts	1NC
Standards	EN60947-5-5

Enclosure

Enclosure colour	Yellow
Degree of Protection	IP65
Ambient temperature	25 to +60°C (no freezing)
Relative humidity	45 to 85%RH (no condensation)
Storage temperature	40 to +80°C (no freezing)
Electric Shock Protection	Class II (when class II switches & pilot devices are installed)
Degree of pollution	3
Enclosure Size (mm)	76 x 76 x 59.5

DIMENSIONS

FB1W-X4F01R

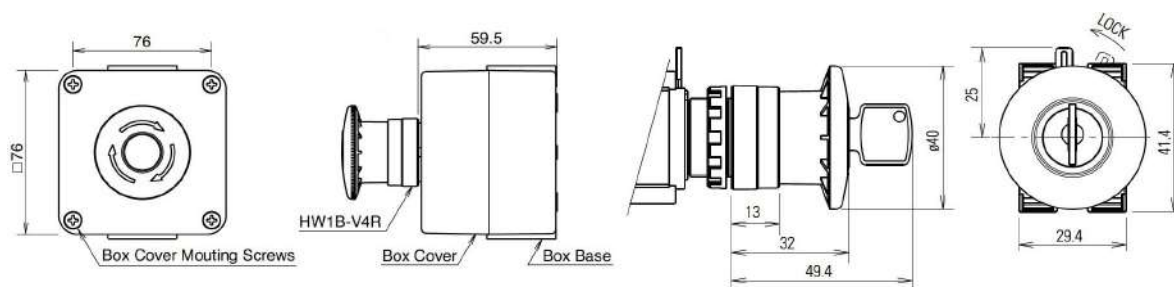

Emergency stop label available separately, part : HWAV-27