



TL-D LIFEMAX Super 80

TL-D 30W/840 1SL/25

The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

• General Information

Cap base	G13 [Medium Bi-Pin Fluorescent]
Bulb shape	T8 [26 mm (T8)]
Life to 10% failures (nom.)	10000 h
Life to 50% failures (nom.)	13000 h
Life to 50% failures preheat (nom.)	20000 h

• Light Technical

Lamp Luminous Flux (Nom)	2400 lm
Colour Designation	Cool White (CW)
Lumen maintenance 2,000 hours (nom.)	96 %
Lumen maintenance 5,000 hours (nom.)	94 %
Chromaticity coordinate X (nom.)	383
Chromaticity coordinate Y (nom.)	386
Colour Temperature, horizontal (Nom)	4100 K
Lamp Luminous Efficacy EM (Nom)	80 lm/W
Colour Rendering Index, horiz (Nom)	82

• Operating and Electrical

Power (Rated) (Nom)	30 W
---------------------	------

Lamp current (nom.)	0.360 A
Voltage (Nom)	98 V

• Controls and Dimming

Dimmable	yes
----------	-----

• Mechanical and Housing

Cap base information	Green [Green Cap]
----------------------	--------------------

• Approval and Application


Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg

• Product Data

Full product code	871150028588100
Order product name	TL-D 30W/840 1SL/25
EAN/UPC – product	8711500285881
Order code	927981284036
Local Code	TLD30W840
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	927981284036
Net weight (piece)	0.130 kg


PHILIPS

Dimensional drawing

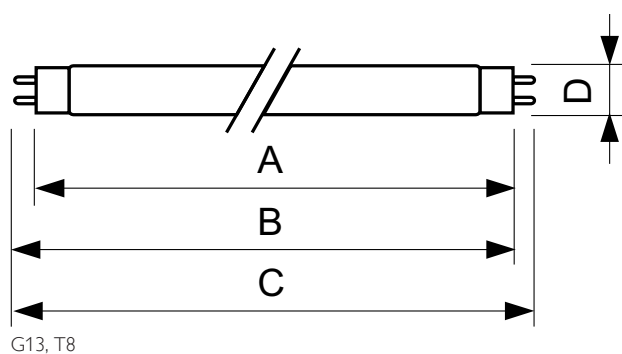

TL-D 30W/840/GC

Product	D	A	B	B	C
TL-D 30W/840 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, November 9
data subject to change