

Catalogue No: **M6RCBS-10-30-CAN**

RCBO MOD6 1P+N 6kA 10A C CURVE 30mA TYPE A S/NEUT PIGTAIL

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > MOD6 Residual Current Device > MOD6 Compact RCBO 6kA (RCBS) Loadcentre / Panelboard Model (with Pigtail) > Type A Switched Neutral



RCBO MOD6 1P+N 6kA 10A C CURVE 30mA TYPE A S/NEUT PIGTAIL

- Approval No NSW24576 or RCM



Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	MOD6
Component Type Power Distribution & Protection	RCBO
Trip Curve	C
RCD Type, AS/NZS 61008/61009	A (Switched Neutral)
In, Rated Current at 30°C	10 A @30°C
IΔn, Rated Leakage Current	30 mA
Poles	1P + N
Neutral Pole Protected	Yes
Rated Frequency	50 / 60 Hz
Un, Nominal Operational Voltage, AC	240 V AC
U _{bmin} , Service Voltage, AC, Min	85 V AC
U _{bmax} , Service Voltage, AC, Max	255 V AC
Selectivity Class (IEC 60898)	3
IΔm, Rated Residual Make/Break Capacity	3000 A
I _{cn} , Rated Short Circuit Capacity	6 kA
Isolator Application, IEC 60947-2	Yes
Ui, Rated Insulation Voltage	500 V (rms)
Approval(s)	N24576
Insulation Resistance	1000 MΩ
Dielectric Strength	2500V
Electrical Service Life at Un, In	10000 cycles
Mechanical service life	20000 cycles
IP Rating, Inside	IP40
IP Rating, Outside	IP20
Flammability Rating (UL94)	UL 94 V-2
Wire / Conductor Size, Rigid Cable, Top, Max	16 mm ² Top
Wire / Conductor Size, Rigid Cable, Bottom, Max	25 mm ² Bottom
Tightening Torque, Top, Nominal	3 Nm



Catalogue No: **M6RCBS-10-30-CAN**

RCBO MOD6 1P+N 6kA 10A C CURVE 30mA TYPE A S/NEUT PIGTAIL

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > MOD6 Residual Current Device > MOD6 Compact RCBO 6kA (RCBS) Loadcentre / Panelboard Model (with Pigtail) > Type A Switched Neutral



Tightening Torque, Bottom, Nominal	3 Nm
Busbar System, Top	Fork Pin
Busbar System, Bottom	Fork Pin
Mounting	DIN-35 Rail Mount
Height	86 mm
Width	18 mm
Depth	76 mm
Weight	0.125 kg
Operating Temperature, Min	-5 °C min
Storage Temperature, Min	-25 °C min
Storage Temperature, Max	70 °C max
Relative Humidity, Max	95 %RH
Shock Rating	IEC 60077-16-3
Standards Compliance	AS/NZS 61008 AS/NZS 61008-1 AS/NZS 61009 IEC 60077-16-3 IEC 60947-2

REFERENCES


IECEx Certificate	-
Supplier Declaration of Conformity:	M6RCBSxxxxx_Supplier Declaration of Conformity (SDoC)
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-



Catalogue No: **M6RCBS-10-30-CAN**

RCBO MOD6 1P+N 6kA 10A C CURVE 30mA TYPE A S/NEUT PIGTAIL

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > MOD6 Residual Current Device > MOD6 Compact RCBO 6kA (RCBS) Loadcentre / Panelboard Model (with Pigtail) > Type A Switched Neutral

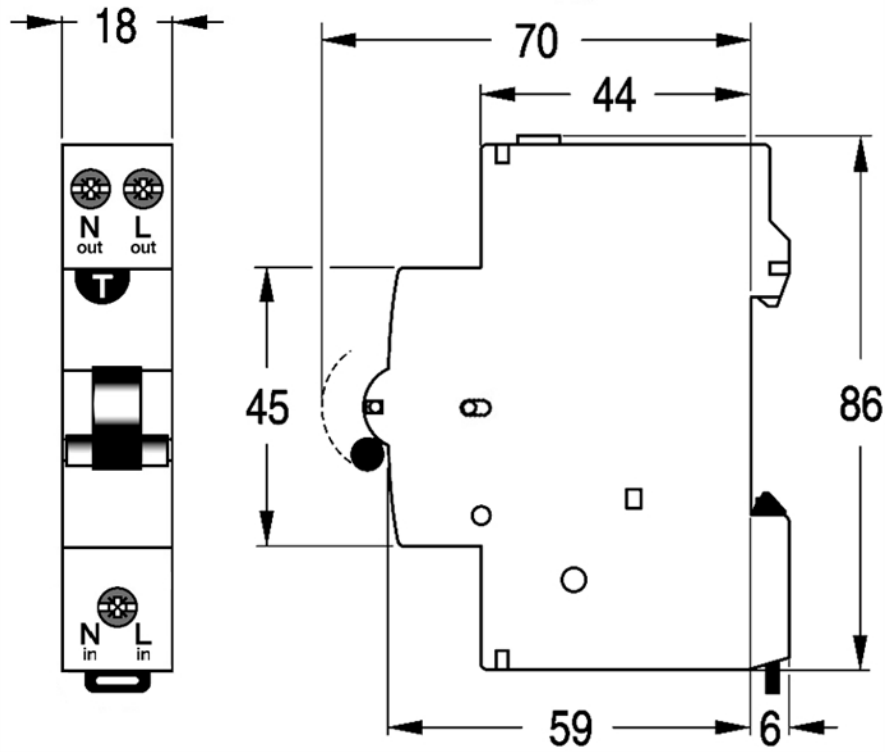

Dimension Diagram