

TM171DWAL2L

Modicon M171 Optimized Wall thermostat with backlight



Main

Range of product	Modicon M171
Product or component type	Display module
Display colour	Monochrome
Supply	External source

Complementary

Display type	Backlit LCD screen
Number of key	4
Colour	White
[Us] rated supply voltage	12 V DC
Power consumption in W	5 W 0 W
Marking	CE
Realtime clock	With realtime clock
Local signalling	LCD display
Product compatibility	Logic controller M171 optimized
Height	137 mm
Width	96.5 mm
Depth	31.3 mm
Product weight	0.143 kg

Environment


standards	RoHS compliant
product certifications	CURus REACH
IP degree of protection	IP40 on front face

Offer Sustainability


Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1427 - Schneider Electric declaration of conformity
REACH	Reference contains SVHC above the threshold

Dimensions


The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

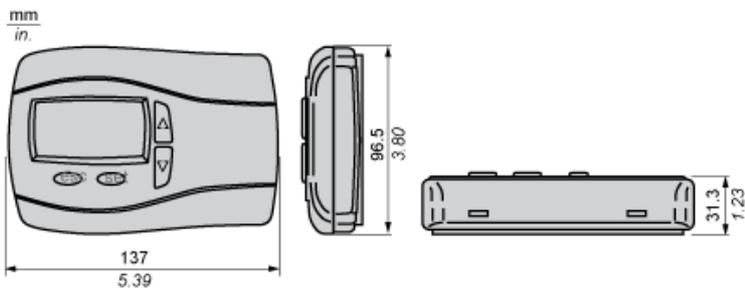

Mounting

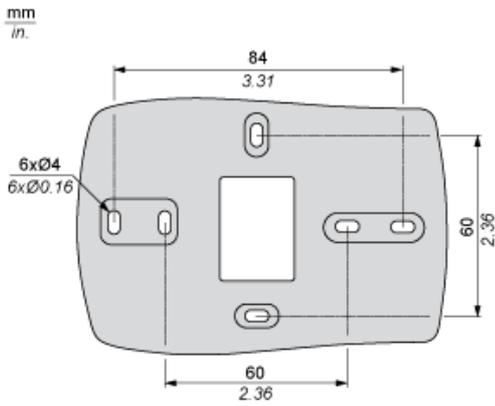

Wiring Diagram

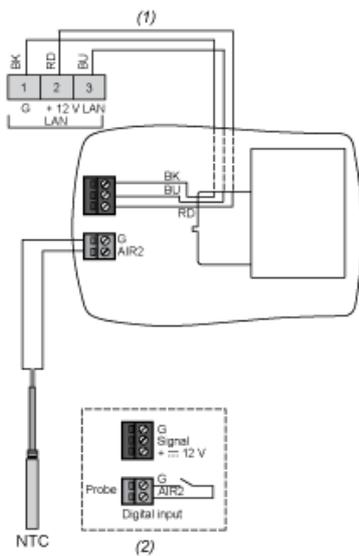


- (1) LAN Expansion bus
(2) Remote probe not included

RD : Red

BU : Blue

BK : Black

Ex.Transducer

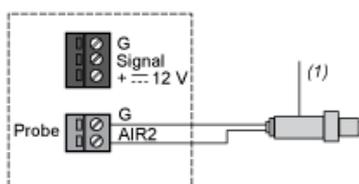

- (1) Power supply