



MASTER TL-D Super 80

TL-D 36W/865 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope


Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Bulb shape	T8 [26 mm (T8)]
Life to 10% failures (nom.)	10000 h
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h
Light Technical	
Lamp Luminous Flux (Nom)	3070 lm
Colour Designation	Cool Daylight
Lumen maintenance 2,000 hours (nom.)	96 %
Lumen maintenance 5,000 hours (nom.)	94 %
Chromaticity coordinate X (nom.)	313
Chromaticity coordinate Y (nom.)	338
Colour Temperature, horizontal (Nom)	6500 K
Lamp Luminous Efficacy EM (Nom)	85 lm/W
Colour Rendering Index, horiz (Nom)	80
Operating and Electrical	
Power (Rated) (Nom)	36 W
Lamp current (nom.)	0.440 A
Voltage (Nom)	103 V

Controls and Dimming	
Dimmable	yes
Mechanical and Housing	
Cap base information	Green [Green Cap]
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg
Product Data	
Full product code	871829125462100
Order product name	TL-D 36W/865 1SL/25
EAN/UPC – product	8718291254621
Order code	927981386524
Local Code	TLD36W865ALTO
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	927981386524
Net weight (piece)	0.140 kg

MASTER TL-D Super 80

Dimensional drawing

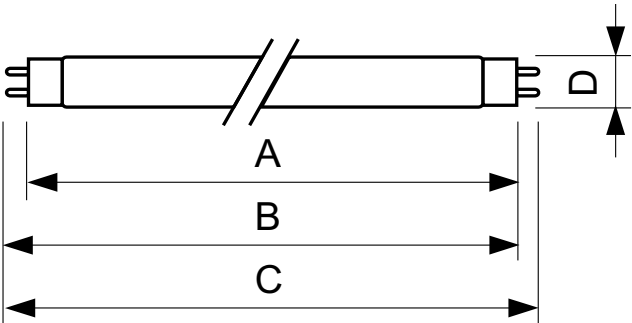

TL-D 36W/865

Product	D	A	B	B	C
TL-D 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

