



MASTERColour CDM-T

MASTERColour CDM-T 150W/942 G12 1CT

Range of single-ended, compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Product data

• General Information

Cap base	G12 [G12]
Bulb shape	T19 [T 19mm]
Burning Position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	9000 h
Life to 10% failures (nom.)	10000 h
Life to 20% failures (nom.)	11000 h
Life to 50% failures (nom.)	12000 h
ANSI code HID	C142/E

• Light Technical

Lamp Luminous Flux (Nom)	12000 lm
Colour Designation	Cool White (CW)
Lumen maintenance 10,000 hours (nom.)	70 %
Lumen maintenance 2,000 hours (min.)	75 %
Lumen maintenance 2,000 hours (nom.)	85 %
Lumen maintenance 5,000 hours (min.)	70 %
Lumen maintenance 5,000 hours (nom.)	80 %
Chromaticity coordinate X (nom.)	0.375
Chromaticity coordinate Y (nom.)	0.363
Colour Temperature, horizontal (Nom)	4200 K
Lamp Luminous Efficacy EM (Nom)	83 lm/W

Colour Rendering Index, horiz (Nom)	96
-------------------------------------	----

• Operating and Electrical

Power (Rated) (Nom)	150 W
Lamp current run-up (max.)	2.5 A
Lamp current (EM) (nom.)	1.9 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition peak voltage (min.)	3500 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	98 V
Voltage (Min)	82 V
Voltage (Nom)	90 V

• Controls and Dimming

Dimmable	no
Run-up time 90% (max.)	3 min

• Mechanical and Housing

Bulb finish	Clear (CL)
-------------	------------

PHILIPS

MASTERColour CDM-T

• Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	10.4 mg
Energy Consumption kWh/1000 h	165 kWh

• UV

PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.4

• Luminaire Design Requirements

Bulb temperature (max.)	650 °C
Cap base temperature (max.)	280 °C

Pinch temperature (max.)	350 °C
--------------------------	--------

• Product Data


Full product code	871150020005115
Order product name	MASTERColour CDM-T 150W/942 G12 1CT
EAN/UPC – product	8711500200051
Order code	928084605131
Local Code	CDMT150W942
Numerator – quantity per pack	1
Numerator – packs per outer box	12
Material no. (12NC)	928084605131
Net weight (piece)	0.033 kg
ILCOS Code	MT/UB-150/942-H-G12-21/100

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

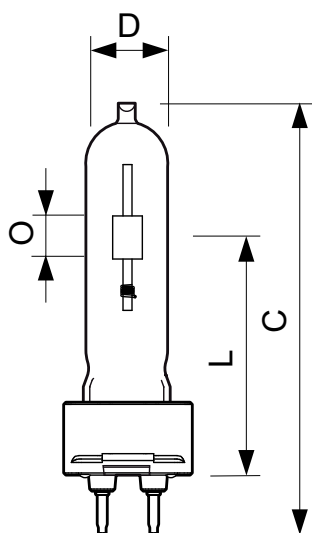


CDM-T 35W, 70W, 150W G12


CDM-T 150W/942 G12

Product	D	D	O	L	L	L	C
MASTERColour CDM-T 150W/942 G12 1CT	20 mm	0.75 in	8 mm	55 mm	57 mm	56 mm	110 mm

Dimensional drawing



Photometric data

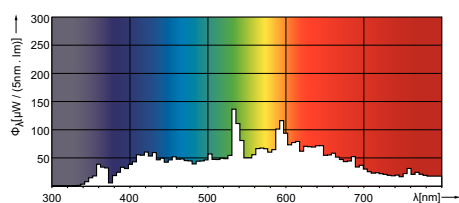

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 10
data subject to change